



# **CHARGING SYSTEMS AND CAR ACCESSORIES 2025/26**





**JUMP-START – POWER BANKS**  
see pages 6 - 7



**IMPACT WRENCHES,  
IMPACT SCREWDRIVERS,  
RATCHET SCREWDRIVER**  
see pages 14 - 16



**TROLLEY JACK**  
see page 17



**BATTERY CHARGERS**  
see pages 8 - 12



**POLISHING MACHINES**  
see pages 17 - 19



**COMPRESSORS**  
see pages 19 - 25



**JUMP START CABLES**  
see pages 13



**VACUUM CLEANERS**  
see pages 26 - 29

## POWER X-CHANGE

Power X-Change | One battery for everything.

4

## STARTING / CHARGING SYSTEMS

Jump-Start – Power Banks	6	Analog Battery Chargers	12
Microprocessor-controlled Battery Chargers	8	Jump Start Cables	13

## CAR ACCESSORIES

Cordless Impact Wrenches	14	Cordless Air Pump	20
Impact Wrenches	16	Cordless Car Compressors	21
Cordless Ratchet Screwdriver	16	6-in-1 Cordless Hybrid Compressors	21
Trolley Jack	17	3-in-1 Cordless Compressors	22
Cordless Car Polishing Machine	17	Cordless Compressors	23
Car Polishing Machine	17	Cordless Wet and Dry Vacuum Cleaners	26
Cordless Eccentric Polisher	18	Cordless Stick Vac Cleaner	28
Cordless Polishing/Sanding Machine	18	Cordless Handheld Vacuum Cleaners	29
Polishing and Sanding Machines	19	Battery-Powered Cool Box	29
Car Compressors	20	Power X-Change   Batteries, Starter Kits, Chargers	30

# GUARANTEE PROMISE.

In addition to offering excellent value for money, we also ensure that our products are reliable, high-quality and safe.

This is reflected in our various warranties: take advantage of our warranty extension on Einhell tools and Power X-Change batteries to benefit from our top warranty service for even longer.

## » 3 Year Product Warranty

Warranty extension for your Power X-Change device to 3 years.

## » 30 Day Money Back Guarantee

For 100 % satisfaction with your Power X-Change device.

## » Power X-Change Battery Warranty

Warranty extension for Power X-Change batteries to 3 years.

## » Brushless Warranty

Warranty extension for all PurePOWER Brushless products to 10 years.\*

## THIS IS HOW

Find out more at [einhell.de](http://einhell.de), register in your customer account and apply for the warranty.

Further information is available at [www.einhell.de/en/services/warranties/](http://www.einhell.de/en/services/warranties/)



\* This warranty covers only defects in the engine that are due to a material or manufacturing defect!

Do you have any questions?

The Einhell Service hotline will be happy to help you.

### Einhell-Service

Eschenstr. 6  
94405 Landau/Isar  
Germany  
Tel. +49 (0) 9951 959 2000  
Service-DE@einhell.com  
www.einhell-service.de

### Einhell Germany AG

Wiesenweg 22  
94405 Landau/Isar  
Germany  
info@einhell.de  
www.einhell.de



## A SINGLE BATTERY FOR OVER 350 TOOLS, ELIMINATING SYSTEM CHAOS.

**POWER X-CHANGE** is the only truly standardized battery platform for home, garden and workshop use. While other manufacturers use diverse battery systems, Einhell consistently relies on **a single, universal platform for all purposes**. The **PXC BATTERY** fits in any device, regardless of whether you are using a drill, lawn mower, wet and dry vacuum cleaner or high-pressure cleaner. **This eliminates system chaos, the need for different chargers and compatibility issues.**

Other brands offer separate battery platforms for each of their performance ranges. This leads to confusion and additional expense, because different batteries are needed for different devices. With **POWER X-CHANGE**, you won't have this problem! A single system covers the entire range of tools, from garden equipment and household tools to recreational products.

### FLEXIBILITY AND PERFORMANCE ACCORDING TO YOUR NEEDS.

Each situation poses unique challenges in terms of performance. With **POWER X-CHANGE**, you are free to select the precise battery capacity that suits your project's needs. Thanks to battery options ranging from **2.0 Ah to 8.0 Ah**, you are free to choose whether you prefer lightweight tools with low energy needs or high-performance machines with maximum runtime.

For particularly demanding tasks, **two 18 V batteries can be combined to produce 36 V**.

#### Runtime is automatically doubled on certain tools

Selected tools intelligently run on two 18 V batteries, one after the other:

- » One PXC battery runs while the other waits its turn.
- » The tool automatically switches over to the second battery when needed.

This results in double the runtime, with no need for interruptions or manual action.

When combined with tools that use two batteries at once for 36 V, you can have up to four batteries in place, offering 2x 36 V and automatically switching over. Perfect for prolonged use and steady performance.





## THE BATTERY PLATFORM THAT GROWS WITH YOU.

A single investment in the **POWER X-CHANGE** system offers long-term flexibility. From a cordless screwdriver today to hedge trimmers tomorrow, your PXC battery grows as your projects develop. The platform is designed for expansion, so that you can add new tools at any time without having to worry about battery compatibility.

Featuring over 350 tools, **POWER X-CHANGE** is one of the largest battery platforms on the market. The product range is constantly growing, ensuring not only that you have the right tool for your current project but also that you are well equipped for the challenges to come. **Einhell is focused on the future: once you join the system, you will benefit from new opportunities for years to come.**

## COST-EFFICIENT, PRACTICAL AND SUSTAINABLE.

**POWER X-CHANGE** not only saves you money, but also space and resources. Why buy a different battery for each tool when you can have a single type of battery that fits every purpose? This results in a lower purchase price and also eliminates the need for additional chargers.

Our carefully designed battery technology ensures that PXC batteries afford exceptional durability and efficient energy management. Fewer batteries means fewer raw materials used and less electronic waste. Thus, Einhell makes an important contribution to sustainability and resource preservation while at the same time saving you, the consumer, money.

## INNOVATIVE BATTERY TECHNOLOGIES.

For use under the toughest conditions, **SEALED** Technology (rated IP57) protects the PXC battery from water and dust.

With up to 1350 watts of power per PXC battery, PXC tools offer top-rate cordless performance. Thanks to Twin Pack Technology, two 18 V batteries can be combined to produce 36 V, providing up to 2700 watts of power.

**Multi-Ah Technology** allows you to choose between maximum runtime (+60 %) and a service life that is 3x longer by simply pushing a button.

The **Active Battery Management System (ABS)** reliably protects the battery from overload, deep discharge and overheating through constant cell monitoring and smart load management. At the same time, ABS optimizes each cell for maximum runtime, extended service life and safe performance. In sleep mode, the system saves energy, keeping the battery ready for use.

With **POWER X-CHANGE Plus**, batteries offer not only more capacity, but also more power, exactly when and where it is needed.



## ONE BATTERY FOR EVERYTHING: OVER 350 TOOLS, ONE PLATFORM, NO COMPROMISES

## » 2-in-1 function.

Start and charge in one device: on the one hand, jump starting without external assistance, on the other hand, power bank, i.e. mobile power supply for smartphones, tablets and much more.

## » Simple and safe to use.

Dual temperature monitoring and reverse polarity protection protect users, devices and connected vehicles or devices from damage.

## » Helpful in an emergency.

Integrated LED work light serves as a steady-on light for illumination and as a strobe light or SOS signal in the event of an accident or breakdown..

## » Smart Cell Control.

Smart Cell Control technology ensures maximum performance thanks to a lithium polymer battery, consistently optimal power output and maximum battery life.



# THE MOBILE ENERGY BOOST.



WHICH JUMP-START – POWER BANK FOR WHICH VEHICLE?

	CE-JS 18/1	CE-JS 12/1	CE-JS 8/1
≤ 3000 cm <sup>3</sup>	●	●	●
≤ 4000 cm <sup>3</sup>	●	●	●
≤ 8000 cm <sup>3</sup>	●	●	●
≤ 2000 cm <sup>3</sup>	●	●	●
≤ 5000 cm <sup>3</sup>	●	●	●
Benzin	●	●	●
Benzin	●	●	●
Benzin	●	●	●
Diesel	●	●	●
Diesel	●	●	●

● Suitable      ● Not suitable



- » Jump start and power bank
- » Jump start cable
- » LED charge status indicator
- » LED work light
- » Charging of cell phone / tablet / camera
- » Charging of notebook / laptop

## JUMP-START - POWER BANK

### CE-JS 18/1

Capacity	3 x 6000 mAh (66.6 Wh)
Start voltage	12 V
Start current / Peak current	300 A / 600 A
USB outlet	5 V / 2 A and 3 A
Consumption outlet	12 V   10 A / 19 V   3.5 A
For petrol engines up to	8000 cm <sup>3</sup>
For diesel engines up to	5000 cm <sup>3</sup>
Charging time	6 h
Product weight	0.7 kg
USB adapter cables (Micro/Mini/Typ C USB)	•
Adapter cable with 9 different notebook adapters	•
230 V charging adapter	•
Storage case	•
Article number	1091531
	4 006825 626353



- » Jump start and power bank
- » Jump start cable
- » LED charge status indicator
- » LED work light
- » Charging of cell phone / tablet / camera
- » Charging of notebook / laptop

## JUMP-START - POWER BANK

### CE-JS 12/1

Capacity	3 x 3700 mAh (41.1 Wh)
Start voltage	12 V
Start current / Peak current	200 A / 400 A
USB outlet	5 V / 2 A and 3 A
Consumption outlet	12 V   10 A / 19 V   3.5 A
For petrol engines up to	4000 cm <sup>3</sup>
For diesel engines up to	2000 cm <sup>3</sup>
Charging time	5 h
Product weight	0.5 kg
USB adapter cables (Micro/Mini/Typ C USB)	•
Adapter cable with 9 different notebook adapters	•
230 V charging adapter	•
Storage case	•
Article number	1091521
	4 006825 626346



- » Jump start and power bank
- » Jump start cable
- » LED charge status indicator
- » LED work light
- » Charging of cell phone / tablet / camera

## JUMP-START - POWER BANK

### CE-JS 8/1

Capacity	3 x 2500 mAh (27.75 Wh)
Start voltage	12 V
Start current / Peak current	200 A / 400 A
USB outlet	5 V / 2 A and 3 A
For petrol engines up to	3000 cm <sup>3</sup>
Product weight	0.4 kg
USB adapter cables (Micro/Mini/Typ C USB)	•
USB charging cable	•
Storage case	•
Article number	1091511
	4 006825 626339

## » All-round chargers.

Depending on the model, batteries can be charged and cars and motorcycles can be jump-started. They are suitable for charging gel, AGM and lead-acid batteries, and one model is also suitable for lithium iron phosphate batteries.

## » Microprocessor-controlled.

The chargers are intelligent systems with a multi-stage charging cycle, monitored by a microprocessor control system.

## » Various charging modes.

The smart control electronics initiate the optimal mode depending on the condition of the connected battery – including recovery mode for reactivating fully discharged batteries.

## » Winter charging mode.

Thanks to winter charging mode, the charging process automatically adjusts to temperatures below 5° Celsius.

## » Trickle charge function.

The trickle charge function protects the battery being charged and extends its service life, especially in seasonal vehicles.

## THE RIGHT CHARGER FOR EVERY USE.

Charging time (hours)**	CE-BC 1 M	CE-BC 2 M	CE-BC 4 M	CE-BC 5 M LiFePO4	CE-BC 6 M	CE-BC 10 M	CE-BC 15 M	CE-BC 30 M	⚡ *
Charging voltage	6V / 12V	12V	12V	12V	12V	12V	12V	12V / 24V	
 4 h		 2 h							4 Ah
 12 h		 6 h	 3 h						12 Ah
 18 h		 9 h	 5 h	 4 h	 3 h				18 Ah
 11 h		 9 h	 9 h	 8 h					45 Ah
 18 h		 18 h	 14 h	 12 h	 7 h				70 Ah
 17 h		 17 h			 10 h	 7 h	 7 h		100 Ah
 12 h		 12 h				 12 h	 8 h		120 Ah
 15 h		 15 h			 10 h	 5 h	 5 h		145 Ah
 18 h		 18 h			 12 h	 12 h	 6 h		180 Ah
 13 h		 13 h				 13 h			200 Ah

 Very suitable

 Suitable

 Less suitable

 Not suitable

# THE SMART ALL-ROUNDERS

Gel / AGM / Blei-Säure Batterien



Microprocessor Chargers are suitable for gel, AGM, low-maintenance and maintenance-free lead-acid batteries.

Select the charger that matches the size of your battery. The higher the charge current (A) provided by the charger, the faster the battery gets charged. A charger which provides a charging current equal to 1/10 of the battery capacity is ideal. 60 Ah → 6 A.

\* Frequently installed battery sizes

\*\* Charging times are subject to variation. The times given assume that battery charging takes place at the maximum current output of the charger. The charging time also depends on the battery charge state. Chargers with a lower amperage can certainly also be used for pure trickle charging.



## MICROPROCESSOR-CONTROLLED BATTERY CHARGER

### CE-BC 30 M

Mains connection	230 V ~ 50 Hz	
Charging voltage	12 V / 24 V	
Suitable for batteries (from min. Ah to max. Ah)	3 - 600 Ah	
Charging current	15 A (at 24 V) / 30 A (at 12 V)	
Product weight	11.0 kg	
Article number	1002275	4 006825 643350

- » Microprocessor-controlled, multi-step charging cycle
- » Suitable for Gel / AGM / lead-acid batteries
- » Max. boost engine output (eff.): 100 A - 5 sek
- » Winter charging mode
- » Fully insulated battery clamps
- » Electronic protection against overcharging / short-circuit / swapped poles
- » Trickle charge function
- » Carry handle



## MICROPROCESSOR-CONTROLLED BATTERY CHARGER

### CE-BC 15 M

Mains connection	230 V ~ 50 Hz	
Charging voltage	12 V	
Suitable for batteries (from min. Ah to max. Ah)	3 - 300 Ah	
Charging current	15 A	
Product weight	7.0 kg	
Article number	1002265	4 006825 643367

- » Microprocessor-controlled, multi-step charging cycle
- » Suitable for Gel / AGM / lead-acid batteries
- » Max. boost engine output (eff.): 100 A - 5 sek
- » Winter charging mode
- » Fully insulated battery clamps
- » Electronic protection against overcharging / short-circuit / swapped poles
- » Trickle charge function
- » Carry handle



## MICROPROCESSOR-CONTROLLED BATTERY CHARGER

### CE-BC 10 M

Mains connection	220 - 240 V ~ 50 Hz
Charging voltage	12 V
Suitable for batteries (from min. Ah to max. Ah)	3 - 200 Ah
Charging current	10 A
Product weight	0.7 kg
Article number	1002245

4 006825 640335

- » Microprocessor-controlled, multi-step charging cycle
- » Suitable for Gel / AGM / lead-acid batteries
- » Winter charging mode
- » Fully insulated battery clamps
- » Electronic protection against overcharging / short-circuit / swapped poles
- » Trickle charge function
- » Recondition + Power Supply Mode
- » Dustproof and protected against water jets: protection class IP65
- » Suspension eye



## MICROPROCESSOR-CONTROLLED BATTERY CHARGER

### CE-BC 6 M

Mains connection	220 - 240 V ~ 50 Hz
Charging voltage	12 V
Suitable for batteries (from min. Ah to max. Ah)	3 - 150 Ah
Charging current	6 A
Product weight	0.6 kg
Article number	1002235

4 006825 640328

- » Microprocessor-controlled, multi-step charging cycle
- » Suitable for Gel / AGM / lead-acid batteries
- » Winter charging mode
- » Fully insulated battery clamps
- » Electronic protection against overcharging / short-circuit / swapped poles
- » Trickle charge function
- » Recondition + Power Supply Mode
- » Dustproof and protected against water jets: protection class IP65
- » Suspension eye



## MICROPROCESSOR-CONTROLLED BATTERY CHARGER

### CE-BC 5 M LiFePO4

Mains connection	220 - 240 V ~ 50 Hz
Charging voltage	12 V
Suitable for batteries (from min. Ah to max. Ah)	5 - 120 Ah
Charging current	5 A
Product weight	0.6 kg
Article number	1002251

4 006825 671520

- » Microprocessor-controlled, multi-step charging cycle
- » Suitable for Gel / AGM / lead-acid batteries
- » Suitable for lithium-iron-phosphate batteries
- » Winter charging mode
- » Fully insulated battery clamps
- » Electronic protection against overcharging / short-circuit / swapped poles
- » Trickle charge function
- » Recondition + Power Supply Mode
- » Force function
- » Dustproof and protected against water jets: protection class IP65
- » Suspension eye



## MICROPROCESSOR-CONTROLLED BATTERY CHARGER

### CE-BC 4 M

Mains connection	220 - 240 V ~ 50 Hz
Charging voltage	12 V
Suitable for batteries (from min. Ah to max. Ah)	3 - 120 Ah
Charging current	4 A
Product weight	0.4 kg
Article number	1002225

4 006825 640311

- » Microprocessor-controlled, multi-step charging cycle
- » Suitable for Gel / AGM / lead-acid batteries
- » Winter charging mode
- » Fully insulated battery clamps
- » Electronic protection against overcharging / short-circuit / swapped poles
- » Trickle charge function
- » Recondition + Power Supply Mode
- » Dustproof and protected against water jets: protection class IP65
- » Suspension eye



## MICROPROCESSOR-CONTROLLED BATTERY CHARGER

### CE-BC 2 M

Mains connection	220 - 240 V ~ 50 Hz
Charging voltage	12 V
Suitable for batteries (from min. Ah to max. Ah)	3 - 60 Ah
Charging current	2 A
Product weight	0.3 kg
Article number	1002215

4 006825 640304

- » Microprocessor-controlled, multi-step charging cycle
- » Suitable for Gel / AGM / lead-acid batteries
- » Winter charging mode
- » Fully insulated battery clamps
- » Electronic protection against overcharging / short-circuit / swapped poles
- » Trickle charge function
- » Dustproof and protected against water jets: protection class IP65
- » Suspension eye



## MICROPROCESSOR-CONTROLLED BATTERY CHARGER

### CE-BC 1 M

Mains connection	220 - 240 V ~ 50 Hz
Charging voltage	6 V / 12 V
Suitable for batteries (from min. Ah to max. Ah)	3 - 32 Ah
Charging current	1 A
Product weight	0.2 kg
Article number	1002205

4 006825 640298

- » Microprocessor-controlled, multi-step charging cycle
- » Suitable for Gel / AGM / lead-acid batteries
- » Fully insulated battery clamps
- » Electronic protection against overcharging / short-circuit / swapped poles
- » Trickle charge function
- » Dustproof and protected against water jets: protection class IP65
- » Suspension eye



- » Overload / false poling / short-circuit protection
- » Suitable for lead-acid batteries
- » Built-in ammeter
- » All-insulated construction
- » Fully insulated battery clamps
- » Carry handle

## ANALOG BATTERY CHARGER

### CC-BC 15

Mains connection	230 V ~ 50 Hz
Charging voltage	6 V / 12 V / 24 V
Suitable for batteries (from min. Ah to max. Ah)	10 - 300 Ah
Charging current (eff.) at 6 V	min. 6.5 A / max. 15 A
Charging current (eff.) at 12 V	min. 8 A / max. 15 A
Charging current (eff.) at 24 V	min. 7 A / max. 10 A
Product weight	5.3 kg
Article number	1075031

4 006825 613209



- » Overload / false poling / short-circuit protection
- » Suitable for lead-acid batteries
- » Built-in ammeter
- » All-insulated construction
- » Fully insulated battery clamps
- » Carry handle

## ANALOG BATTERY CHARGER

### CC-BC 12

Mains connection	230 V ~ 50 Hz
Charging voltage	12 V
Suitable for batteries (from min. Ah to max. Ah)	26 - 200 Ah
Charging current (eff.) at 12 V	12 A
Product weight	3.2 kg
Article number	1056721

4 006825 613193



- » Overload / false poling / short-circuit protection
- » Suitable for lead-acid batteries
- » Built-in ammeter
- » All-insulated construction
- » Fully insulated battery clamps
- » Electronics with charging voltage limitation
- » Carry handle

## ANALOG BATTERY CHARGER

### CC-BC 10 E

Mains connection	230 V ~ 50 Hz
Charging voltage	12 V
Suitable for batteries (from min. Ah to max. Ah)	5 - 200 Ah
Charging current (eff.) at 12 V	10 A
Product weight	2.8 kg
Article number	1050821

4 006825 613186



- » Overload / false poling / short-circuit protection
- » Suitable for lead-acid batteries
- » Built-in ammeter
- » All-insulated construction
- » Fully insulated battery clamps
- » Carry handle

## ANALOG BATTERY CHARGER

### CC-BC 5

Mains connection	230 V ~ 50 Hz
Charging voltage	12 V
Suitable for batteries (from min. Ah to max. Ah)	16 - 80 Ah
Charging current (eff.) at 12 V	5 A
Product weight	2.0 kg
Article number	1056121

4 006825 612660



- » Fully insulated pole clamps
- » Protection electronics
- » Carrying bag
- » LED light

## JUMP START CABLE

### BT-BO 25/1 A LED SP

For petrol engines up to max.	5500 cm <sup>3</sup>
For diesel engines up to max.	3000 cm <sup>3</sup>
Battery voltage	12 / 24 V
Cable length	3.5 m
Cable cross section	31.4 mm <sup>2</sup> aluminium (= 25 mm <sup>2</sup> copper cable)
Testing current	350 A
Product weight	1.7 kg
Article number	2030365
	4 006825 603514



- » Fully insulated pole clamps
- » Carrying bag

## JUMP START CABLE

### BT-BO 25/1 A

For petrol engines up to max.	5500 cm <sup>3</sup>
For diesel engines up to max.	3000 cm <sup>3</sup>
Battery voltage	12 / 24 V
Cable length	3.5 m
Cable cross section	31.4 mm <sup>2</sup> aluminium (= 25 mm <sup>2</sup> copper cable)
Testing current	350 A
Product weight	1.7 kg
Article number	2030345
	4 006825 561555



- » Fully insulated pole clamps
- » Protection electronics
- » Carrying bag
- » LED light

## JUMP START CABLE

### BT-BO 16/1 A LED SP

For petrol engines up to max.	2500 cm <sup>3</sup>
Battery voltage	12 / 24 V
Cable length	3 m
Cable cross section	19.4 mm <sup>2</sup> aluminium (= 16 mm <sup>2</sup> copper cable)
Testing current	220 A
Product weight	1.2 kg
Article number	2030360
	4 006825 603491



- » Fully insulated pole clamps
- » Carrying bag

## JUMP START CABLE

### BT-BO 16/1 A

For petrol engines up to max.	2500 cm <sup>3</sup>
Battery voltage	12 / 24 V
Cable length	3 m
Cable cross section	19.4 mm <sup>2</sup> aluminium (= 16 mm <sup>2</sup> copper cable)
Testing current	220 A
Product weight	1.2 kg
Article number	2030335
	4 006825 561548

NEW

BRUSHLESS  
COMPACT

- » Member of the PXC family
- » Brushless motor
- » Auto-Stop stage
- » Speed control electronics
- » LED
- » Belt clip



BRUSHLESS

- » Member of the PXC family
- » Brushless motor
- » Speed control electronics
- » LED
- » Belt clip



NEW

BRUSHLESS  
COMPACT

- » Member of the PXC family
- » Brushless motor
- » Auto-Stop stage
- » Speed control electronics
- » LED
- » Belt clip



## PROFESSIONAL CORDLESS IMPACT WRENCH 18 V

### TP-CW 18/750-C Li Brushless

PXC battery voltage	18 V
Idle speed	0 - 1000 / 0 - 1500 / 0 - 2200 min <sup>-1</sup>
Number of torque settings	3 + 1
Torque (stage 1 / 2 / 3 / Auto-Stop)	300 / 370 / 750 / 100 Nm
Loosening torque (max.)	1000 Nm
Tool mounting	External square (1/2")
Housing length	170 mm
Product weight	1.8 kg (excl. battery)
Accessories	Bit adapter, 3-piece nut set
Packaging	Colour box
Article only available without battery / charger	Article number 4510065

<sup>1)</sup>	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<sup>2)</sup>	810 pcs	1010 pcs	1215 pcs	1620 pcs	2100 pcs	2430 pcs	3240 pcs

For best performance select a battery with at least 3.0 Ah

<sup>1)</sup> Battery capacity<sup>2)</sup> Max. number of wheel bolts (hexagon head, wrench size 22 mm, tightened to 120 Nm) that can be released per battery charge

## PROFESSIONAL CORDLESS IMPACT WRENCH 18 V

### IMPAXXO 18/450

PXC battery voltage	18 V
Idle speed	0 - 1000 / 0 - 1500 / 0 - 2100 min <sup>-1</sup>
Number of torque settings	3
Torque (stage 1 / 2 / 3)	200 / 280 / 450 Nm
Loosening torque (max.)	800 Nm
Tool mounting	12.5 mm (1/2") external square drive mount
Housing length	205 mm
Product weight	2.0 kg (excl. battery)
Accessories	Bit adapter, 3-piece nut set
Packaging	Colour box
Article only available without battery / charger	Article number 4510070

<sup>1)</sup>	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<sup>2)</sup>	760 pcs	950 pcs	1140 pcs	1520 pcs	1975 pcs	2280 pcs	3040 pcs

For best performance select a battery with at least 2.5 Ah

<sup>1)</sup> Battery capacity<sup>2)</sup> Max. number of wheel bolts (hexagon head, wrench size 22 mm, tightened to 120 Nm) that can be released per battery charge

## PROFESSIONAL CORDLESS IMPACT WRENCH 18 V

### TP-CW 18/350-C Li Brushless

PXC battery voltage	18 V
Idle speed	0 - 1100 / 0 - 1700 / 0 - 2400 min <sup>-1</sup>
Number of torque settings	3 + 1
Torque (stage 1 / 2 / 3 / Auto-Stop)	140 / 200 / 350 / 100 Nm
Loosening torque (max.)	600 Nm
Tool mounting	External square (1/2")
Housing length	132 mm
Product weight	1.0 kg (excl. battery)
Accessories	Bit adapter, 3-piece nut set
Packaging	Colour box
Article only available without battery / charger	Article number 4510055

<sup>1)</sup>	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<sup>2)</sup>	720 pcs	900 pcs	1080 pcs	1440 pcs	1870 pcs	2160 pcs	2880 pcs

For best performance select a battery with at least 2.5 Ah

<sup>1)</sup> Battery capacity<sup>2)</sup> Max. number of wheel bolts (hexagon head, wrench size 22 mm, tightened to 120 Nm) that can be released per battery charge

NEW

## BRUSHLESS COMPACT

- » Member of the PXC family
- » Brushless motor
- » Auto-Stop stage
- » Speed control electronics
- » LED
- » Belt clip



## PROFESSIONAL CORDLESS IMPACT WRENCH 18 V

## TP-CW 18/260-C Li Brushless

PXC battery voltage	18 V
Idle speed	0 - 1000 / 0 - 1900 / 0 - 2700 min <sup>-1</sup>
Number of torque settings	3 + 1
Torque (stage 1 / 2 / 3 / Auto-Stop)	100 / 160 / 260 / 100 Nm
Loosening torque (max.)	500 Nm
Tool mounting	External square (1/2")
Housing length	119 mm
Product weight	1.0 kg (excl. battery)
Accessories	Bit adapter, 3-piece nut set
Packaging	Colour box
Article only available without battery / charger	Article number 4510090

<sup>1)</sup>	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<sup>2)</sup>	635 pcs	795 pcs	950 pcs	1270 pcs	1650 pcs	1905 pcs	2540 pcs

For best performance select a battery with at least 2.5 Ah

<sup>1)</sup> Battery capacity<sup>2)</sup> Max. number of wheel bolts (hexagon head, wrench size 22 mm, tightened to 120 Nm) that can be released per battery charge

## BRUSHLESS

- » Member of the PXC family
- » Brushless motor
- » Speed control electronics
- » LED
- » Belt clip



## PROFESSIONAL CORDLESS IMPACT WRENCH 18 V

## IMPAXXO 18/230

PXC battery voltage	18 V
Idle speed	0 - 2900 min <sup>-1</sup>
Number of torque settings	1
Torque (max.)	230 Nm
Loosening torque (max.)	450 Nm
Tool mounting	12.5 mm (1/2") external square drive mount
Housing length	166 mm
Product weight	1.1 kg (excl. battery)
Accessories	Bit adapter
Packaging	Colour box
Article only available without battery / charger	Article number 4510080

<sup>1)</sup>	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<sup>2)</sup>	635 pcs	795 pcs	950 pcs	1270 pcs	1650 pcs	1905 pcs	2540 pcs

For best performance select a battery with at least 2.5 Ah

<sup>1)</sup> Battery capacity<sup>2)</sup> Max. number of wheel bolts (hexagon head, wrench size 22 mm, tightened to 120 Nm) that can be released per battery charge

## Cordless Impact Wrenches Accessories

Type	Article number	EAN	Items supplied	Packaging	Application
Impact Socket Set	49109263	4 009311 092632	3-piece: 17, 19, 21 mm drill sockets	Case	For use when changing tyres



- » Right/left-hand rotation
- » Soft grip

## IMPACT SCREWDRIVER

### CC-IW 950/1

Mains connection	230 - 240 V ~ 50 Hz
Power rating	950 W
Idle speed	2300 min <sup>-1</sup>
Max. torque	450 Nm
Tool mounting	12.7 mm (1/2") external square drive mount
Cable length	2 m
Product weight	3.4 kg
Socket wrench bits (incl.)	17, 19, 21, 22 mm - 1 of each
Packaging	Colour box
Article number	4259951
	4 006825 635829



- » Right/left-hand rotation
- » Soft grip

## IMPACT SCREWDRIVER

### CC-IW 450

Mains connection	230 - 240 V ~ 50 Hz
Power rating	450 W
Idle speed	2600 min <sup>-1</sup>
Max. torque	300 Nm
Tool mounting	12.7 mm (1/2") external square drive mount
Cable length	2 m
Product weight	2.0 kg
Socket wrench bits (incl.)	17, 19, 21, 22 mm - 1 of each
Packaging	Colour box
Article number	2048304
	4 006825 626186

## NEW



- » Member of the PXC family
- » Speed control electronics
- » LED
- » Adapter 1/2"

## CORDLESS RATCHET SCREWDRIVER

### TE-RW 18/60 Li

PXC battery voltage	18 V
Idle speed	0 - 260 min <sup>-1</sup>
Torque (hard)	60 Nm
Tool mounting	External square (3/8")
Product weight	0.8 kg (excl. battery)
Accessories	Adapter 1/2"
Packaging	Colour box
Article only available without battery / charger	Article number
	4514320
	4 006825 680621

 <sup>1)</sup>	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
 <sup>2)</sup>	305 pcs	385 pcs	460 pcs	610 pcs	790 pcs	920 pcs	1220 pcs

<sup>1)</sup> Battery capacity

<sup>2)</sup> Max. number of bolts (size 17 mm) that can be locked and released per battery charge



- » 2 ball bearing swivel castors
- » Integrated carry handle
- » Support plate
- » Removable lift rod
- » Integrated safety valve against overloading

## TROLLEY JACK

### CC-TJ 2000

Load capacity	2 t
Lift height min.	135 mm
Lift height max.	330 mm
Product weight	8.7 kg
Article number	2011779
	4 006825 623451



- » Member of the PXC family
- » ON/OFF switch
- » Ergonomic soft grip

## CORDLESS CAR POLISHING MACHINE

### CE-CB 18/254 Li

PXC battery voltage	18 V
Rotation speed	2500 min <sup>-1</sup>
Diameter	254 mm
Product weight	1.9 kg (excl. battery)
Textile bonnet	1 pc
Synthetic bonnet	1 pc
Packaging	Colour box
Article only available without battery / charger	Article number 2093301
	4 006825 626599

 <sup>1)</sup>	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
 <sup>2)</sup>	81 min	93 min	112 min	127 min	200 min	222 min	254 min

For best performance select a battery with at least 2.5 Ah

<sup>1)</sup> Battery capacity

<sup>2)</sup> Max. operating time per battery charge in idle mode



- » ON/OFF switch

## CAR POLISHING MACHINE

### CC-PO 90

Mains connection	230 V ~ 50 Hz
Power rating	90 W
Rotation speed	3700 min <sup>-1</sup>
Diameter	240 mm
Product weight	1.9 kg
Textile bonnet	1 pc
Synthetic bonnet	1 pc
Packaging	Colour box
Article number	2093173
	4 006825 614145

## Polishing Machines Accessories

Type	Article number	EAN	Can be used for	Items supplied
Polishing Bonnets Set	2093095	4 006825 631517	CE-CB 18/254 Li / CC-PO 90	1x synthetic polishing bonnet, 1x textile polishing bonnet

## NEW

## BRUSHLESS



- » Member of the PXC family
- » Brushless motor
- » Soft start
- » Continuous operation switch
- » Ergonomic knob with soft grip
- » Removable side handle
- » Speed control electronics
- » Hook and loop adhesion for polishing accessories

## PROFESSIONAL CORDLESS ECCENTRIC POLISHER

## CP-EP 18/125 Li Brushless

PXC battery voltage	18 V
Rotation speed	500 - 3800 min <sup>-1</sup>
Oscillating circuit	8 mm
Diameter	125 mm
Product weight	1.3 kg (excl. battery)
Foam pad	3 pcs (different hardness levels)
Packaging	Colour box
Article only available without battery / charger	Article number 2093330
	4 006825 682823

<sup>1)</sup>	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<sup>2)</sup>	25 min	30 min	35 min	50 min	65 min	70 min	100 min

<sup>1)</sup> Battery capacity<sup>2)</sup> Max. operating time per battery charge in idle mode

## BRUSHLESS



- » 2-in-1: Sanding and polishing with a single device
- » Member of the PXC family
- » Brushless motor
- » ON/OFF switch
- » Ergonomic soft grip
- » Speed control electronics
- » Spindle lock
- » Hook and loop fastener for polishing/grinding accessory

## CORDLESS POLISHING/SANDING MACHINE

## CE-CP 18/180 Li E

PXC battery voltage	18 V
Rotation speed	500 - 3000 min <sup>-1</sup>
Diameter	180 mm
Product weight	1.3 kg (excl. battery)
Synthetic bonnet	1 pc
Foam pad	1 pc
Abrasive paper (grit size 60, 80, 120)	1 of each
Packaging	Colour box
Article only available without battery / charger	Article number 2093320
	4 006825 638998

<sup>1)</sup>	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<sup>2)</sup>	20 min	25 min	35 min	43 min	54 min	65 min	86 min



## POLISHING AND SANDING MACHINE

### CC-PO 1100/1 E

Mains connection	230 V ~ 50 Hz
Power rating	1100 W
Rotation speed	1000 - 3500 min <sup>-1</sup>
Diameter	180 mm
Product weight	2.5 kg
Synthetic bonnet	2 pcs
Foam pad	1 pc
Abrasive paper (grit size 60, 80, 120)	2 of each
Packaging	Case
Article number	2093264

- » 2-in-1: Sanding and polishing with a single device
- » ON/OFF switch
- » Ergonomic soft grip
- » Speed control electronics
- » Spindle lock
- » Hook and loop fastener for polishing/grinding accessory

**NEW**



## POLISHING AND SANDING MACHINE

### CC-PO 1100/150 CE

Mains connection	220 - 240 V ~ 50 Hz
Idle speed	500 - 3500 min <sup>-1</sup>
Diameter	150 mm
Product weight	2.1 kg
Article number	2093250

- » 2-in-1: Sanding and polishing with a single device
- » ON/OFF switch
- » Soft grip
- » Constant electronics
- » Speed control electronics
- » Spindle lock
- » Hook and loop fastener for polishing/grinding accessory

### Polishing Machines Accessories



Type	Article number	EAN	Can be used for	Items supplied
Polishing/Grinding Set 180 mm	2093233	4 006825 551846	CE-CP 18/180 Li E / CC-PO 1100/1 E	2x synthetic bonnet, 1x foam pad, 6x abrasive paper (60 / 80 / 120 grit, 2 of each)
Polishing/Grinding Set 150 mm (incl. plate)	2093245	4 006825 653977	CE-CP 18/180 Li E / CC-PO 1100/1 E	2x synthetic bonnet, 1x foam pad, 1x polishing disc, 6x abrasive paper (60 / 80 / 120 grit, 2 of each)
Polishing/Grinding Set 150 mm excl. polishing disc	2093246	4 006825 655490	CC-PO 1100/1 E / CC-PO 1100/150 CE	2x synthetic bonnet, 1x foam pad, 6x abrasive paper (60 / 80 / 120 grit, 2 of each)
Polishing Pad Set, 3-piece	2093247	4 006825 684841	CP-EP 18/125 Li Brushless	3x polishing pads (1x soft, 1x medium soft, 1x medium hard)



- » Pressure gauge 0 - 10 bar
- » Extra long connection cable (2.8 m)
- » Valve connector for car tyres (Schrader valve)
- » 4 spare adapters for bike tyres, water balls, air beds, balls

## CAR COMPRESSOR

### CC-AC 35/10 12 V

Mains voltage	12 V
Max. operating pressure	10 bar
Pressure hose length	1500 mm
Product weight	2.0 kg
Article number	2072121
	4 006825 618327



- » Pressure gauge 0 - 18 bar
- » Extra long connection cable (2.9 m)
- » Valve connector for car tyres (Schrader valve)
- » 3 spare adapters for water balls, air beds, balls



## CAR COMPRESSOR

### CC-AC 12 V

Mains voltage	12 V
Max. operating pressure	18 bar
Pressure hose length	450 mm
Product weight	0.6 kg
Article number	2072112
	4 006825 614114



- » Member of the PXC family
- » Locking switch
- » Suitable for deflation
- » Two valve adapters
- » Integrated LED light
- » Suitable for inflating rubber dinghies/air mattresses/other leisure articles

## CORDLESS AIR PUMP

### CE-AP 18 Li

PXC battery voltage	18 V
Air rate	670 l/min
max. pressure	0.05 bar
Product weight	0.4 kg (excl. battery)
Article only available without battery / charger	Article number 2070110
	4 006825 658996

	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
	65 min	81 min	98 min	130 min	169 min	195 min	260 min

<sup>1)</sup> Battery capacity

<sup>2)</sup> Max. operating time per battery charge in idle mode

- » Member of the PXC family
- » Digital pressure indicator
- » Setting of the required pressure
- » Automatic switch-off
- » Manual pumping
- » 3-piece adapter set
- » Accessory storage on the device
- » Ideal for inflating car tyres, cycle tyres, small-volume toys, sports and beach articles



NEW



- » Member of the PXC family
- » Digital pressure indicator
- » Setting of the required pressure
- » Automatic switch-off
- » Manual pumping
- » Memory function
- » Air outlet function
- » Integrated LED light
- » 3-piece adapter set
- » Accessory storage on the device
- » Ideal for inflating car tyres, cycle tyres, small-volume toys, sports and beach articles



- » Member of the PXC family
- » Hybrid function
- » Digital pressure indicator
- » Integrated LED light
- » Push button for high-pressure pump
- » Cable storage
- » Accessory storage

## CORDLESS CAR COMPRESSOR

### CE-CC 18 Li

PXC battery voltage	18 V
Output rate 0 bar   4 bar   7 bar	12 l/min   10 l/min   8 l/min
Max. operating pressure	11 bar
Pressure hose length	600 mm
Product weight	0.8 kg (excl. battery)
Article only available without battery / charger	Article number 2071010
	4 006825 658309

<sup>1)</sup>	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<sup>2)</sup>	42 min	53 min	63 min	84 min	109 min	126 min	168 min

<sup>1)</sup> Battery capacity<sup>2)</sup> Max. operating time per battery charge in idle mode

## CORDLESS CAR COMPRESSOR

### CE-CC 18/23 D Li

PXC battery voltage	18 V
Output rate 0 bar   4 bar   7 bar	23 l/min   12 l/min   9 l/min
Max. operating pressure	11 bar
Pressure hose length	700 mm
Product weight	1.2 kg (excl. battery)
Article only available without battery / charger	Article number 2071025
	4 006825 683028

<sup>1)</sup>	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<sup>2)</sup>	28 min	33 min	42 min	56 min	70 min	85 min	115 min

<sup>1)</sup> Battery capacity<sup>2)</sup> Max. operating time per battery charge in idle mode

## 6-IN-1 CORDLESS HYBRID COMPRESSOR

### PRESSITO 18/25 Hybrid

PXC battery voltage	18 V
Mains connection	220 - 240 V ~ 50 Hz
Suction power	25 l/min
Output rate 0 bar   4 bar   7 bar	19 l/min   12 l/min   10 l/min
Max. operating pressure	11 bar
Product weight	2.7 kg (excl. battery)
Hoses incl.	High-pressure hose (71 cm), low-pressure hose (160 cm)
Adapter set	•
Article only available without battery / charger	Article number 4020430
	4 006825 667318

<sup>1)</sup>	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<sup>2)</sup>	22 min	28 min	34 min	44 min	58 min	68 min	88 min

<sup>1)</sup> Battery capacity<sup>2)</sup> Max. operating time per battery charge in idle mode



- » Member of the PXC family
- » Hybrid function
- » Digital pressure indicator
- » Cable storage
- » Accessory storage



## 6-IN-1 CORDLESS HYBRID COMPRESSOR

### PRESSITO

PXC battery voltage	18 V
Mains connection	220 - 240 V ~ 50 Hz
Suction power	21 l/min
Output rate 0 bar   4 bar   7 bar	16 l/min   10 l/min   8 l/min
Max. operating pressure	11 bar
Product weight	2.2 kg (excl. battery)
Hoses incl.	High-pressure hose (71 cm), low-pressure hose (31 cm)
Adapter set	•
Article only available without battery / charger	Article number 4020460
	4 006825 627244

<sup>1)</sup>	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<sup>2)</sup>	30 min	37 min	45 min	60 min	85 min	90 min	120 min

<sup>1)</sup> Battery capacity

<sup>2)</sup> Max. operating time per battery charge in idle mode



- » Member of the PXC family
- » Push button for high-pressure pump
- » Digital pressure indicator
- » Light
- » Accessory storage



## 3-IN-1 CORDLESS COMPRESSOR

### PRESSITO 18/25

PXC battery voltage	18 V
Suction power	25 l/min
Output rate 0 bar   4 bar   7 bar	17 l/min   11 l/min   9 l/min
Max. operating pressure	11 bar
Product weight	2.3 kg (excl. battery)
Hoses incl.	High-pressure hose (71 cm), low-pressure hose (160 cm)
Adapter set	•
Article only available without battery / charger	Article number 4020420
	4 006825 667325

<sup>1)</sup>	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<sup>2)</sup>	22 min	28 min	34 min	44 min	58 min	68 min	88 min

<sup>1)</sup> Battery capacity

<sup>2)</sup> Max. operating time per battery charge in idle mode



- » Member of the PXC family
- » Push button for high-pressure pump
- » Digital pressure indicator
- » Accessory storage



## 3-IN-1 CORDLESS COMPRESSOR

### PRESSITO 18/21

PXC battery voltage	18 V
Suction power	21 l/min
Output rate 0 bar   4 bar   7 bar	14 l/min   9 l/min   6 l/min
Max. operating pressure	10.5 bar
Product weight	2.1 kg (excl. battery)
Hoses incl.	High-pressure hose (71 cm), low-pressure hose (31 cm)
Adapter set	•
Article only available without battery / charger	Article number 4020467
	4 006825 661941

<sup>1)</sup>	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<sup>2)</sup>	30 min	37 min	45 min	60 min	85 min	90 min	120 min

<sup>1)</sup> Battery capacity

<sup>2)</sup> Max. operating time per battery charge in idle mode



- » Member of the PXC family
- » Accessory storage

## CORDLESS COMPRESSOR

### TE-AC 36/8 Li OF Set

PXC battery voltage	2x 18 V
Suction power	130 l/min
Output rate 0 bar   4 bar   7 bar	90 l/min   55 l/min   38 l/min
Tank capacity	without pressure chamber
Max. operating pressure	8 bar
Product weight	5.4 kg (excl. batteries)
Compressed air hose	•
Blow-out adapter	•
Tyre pressure gauge	•
Adapter set	•
Article only available without battery / charger	Article number 4020440
	4 006825 658842

<sup>1)</sup>	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<sup>2)</sup>	8 min	10 min	12 min	16 min	21 min	24 min	32 min
<sup>3)</sup>	6 min	7.5 min	9 min	12 min	15 min	18 min	24 min

<sup>1)</sup> Battery capacity (2x batteries required)

<sup>2)</sup> Max. running time when using a blow-out pistol

<sup>3)</sup> Max. running time when inflating a car tire to 2.5 bar



- » Member of the PXC family
- » Oil-free pump
- » Pressure reducer
- » Accessory storage

## CORDLESS COMPRESSOR

### TE-AC 36/150 Li OF

PXC battery voltage	2x 18 V
Suction power	150 l/min
Output rate 0 bar   4 bar   7 bar	95 l/min   70 l/min   50 l/min
Tank capacity	6 l
Max. operating pressure	8 bar
Product weight	9.2 kg (excl. batteries)
Packaging	Colour box
Article only available without battery / charger	Article number 4020415
	4 006825 672909

<sup>1)</sup>	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<sup>2)</sup>	—	26 pcs	36 pcs	45 pcs	54 pcs	72 pcs	90 pcs
<sup>3)</sup>	—	410 pcs	600 pcs	720 pcs	850 pcs	1200 pcs	1440 pcs

For best performance select a battery with at least 2.5 Ah

<sup>1)</sup> Battery capacity (2x batteries required)

<sup>2)</sup> Tank pressure build-up cycles per battery charge

<sup>3)</sup> Soft wood – max. number of staples (13 mm staples) per battery charge



- » Member of the PXC family
- » Oil-free pump
- » Pressure reducer

## CORDLESS COMPRESSOR

### TE-AC 18/75 Li OF

PXC battery voltage	18 V
Suction power	75 l/min
Output rate 0 bar   4 bar   7 bar	50 l/min   32 l/min   23 l/min
Tank capacity	5 l
Max. operating pressure	8 bar
Product weight	7.8 kg (excl. battery)
Packaging	Colour box
Article only available without battery / charger	Article number 4020410
	4 006825 672404

<sup>1)</sup>	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<sup>2)</sup>	9 pcs	16 pcs	20 pcs	26 pcs	33 pcs	40 pcs	52 pcs
<sup>3)</sup>	130 pcs	175 pcs	210 pcs	280 pcs	360 pcs	420 pcs	560 pcs

For best performance select a battery with at least 2.5 Ah

<sup>1)</sup> Battery capacity

<sup>2)</sup> Tank pressure build-up cycles per battery charge

<sup>3)</sup> Soft wood – max. number of staples (13 mm staples) per battery charge

## Compressed Air Accessories

Type	Article number	EAN	Properties	Packaging
Fabric Hose	4138210	4 006825 574166	Length 15 m, Ø internal: 9 mm	Shrink film
Fabric Hose	4138200	4 006825 410099	Length 15 m, Ø innen: 6 mm	Shrink film
Fabric Hose	4138100	4 006825 410082	Length 10 m, Ø internal: 6 mm	Shrink film
Spiral Hose	4139430	4 006825 673241	Length 10 m, Ø internal: 9 mm	Shrink film
Spiral Hose	4139420	4 006825 411744	Length 8 m, Ø internal: 6 mm	Shrink film
Spiral Hose	4139410	4 006825 411737	Length 4 m, Ø innen: 6 mm	Shrink film
Inflation Adapters Kit	4139695	4 006825 511475	8-piece	Colour box
Mini Oiler	4135002	4 006825 581614	R 1/4" internal thread, R 1/4" external thread	Blister
Filter + Pressure Reducer	4134200	4 006825 410051	Complete with nipple and quick-lock coupling R 1/4"	Colour box
Filter + Pressure Reducer	4134100	4 006825 410044	Complete with nipple and quick-lock coupling R 3/8"	Colour box
Combination Conditioning Unit	4135001	4 006825 410181	Complete with oiler, nipple and quick-lock coupling R 1/4"	Colour box
Combination Conditioning Unit	4135000	4 006825 410075	Complete with oiler, nipple and quick-lock coupling R 3/8"	Colour box
Special Compressed Air Oil	4138310	4 006825 411270	500 ml	Plastic bottle
Abrasive Sand	4138311	4 006825 663877	1 kg, grain size 0.2-0.35 mm	Plastic bottle
Michelin Nipple	4139330	4 006825 588712	Ø 6 mm	Blister
Quick-lock Coupling	4139206	4 006825 410334	R 1/4" IT	Blister
Quick-lock Coupling	4139207	4 006825 560824	R 1/4" ET	Blister
Quick-lock Coupling	4139205	4 006825 410327	R 3/8" IT	Blister
Quick-lock Coupling	4139208	4 006825 560831	R 3/8" ET	Blister
Quick-lock Coupling	4139210	4 006825 599046	R 1/2" internal thread	Blister
Quick-lock Coupling	4139209	4 006825 596939	R 1/2" external thread	Blister
Quick-lock Coupling	4139301	4 006825 581638	Ø 6 mm	Blister
Quick-lock Coupling	4139302	4 006825 581645	Ø 9 mm	Blister
Distributor	4139680	4 006825 411713	2 quick-lock couplings 3/8" IT	Blister
Threaded grommet	4139665	4 006825 581676	Ø 6 mm, R 1/4" ET	Blister
Threaded grommet	4139666	4 006825 581669	Ø 6 mm, R 3/8" ET	Blister
Threaded Nipple	4139655	4 006825 562347	R 1/4" external thread	Blister
Threaded Nipple	4139650	4 006825 411683	R 3/8" external thread	Blister
Threaded Nipple	4139640	4 006825 411676	R 1/4" internal thread	Blister
Threaded Nipple	4139645	4 006825 581683	R 3/8" internal thread	Blister
Grommet	4139660	4 006825 411690	Ø 6 mm	Blister
Grommet	4139661	4 006825 581621	Ø 9 mm	Blister
Double Nipple	4139620	4 006825 411652	R 1/4" external thread	Blister
Double Nipple	4139610	4 006825 411645	R 3/8" external thread	Blister
Reduction	4139600	4 006825 411621	R 3/8" ET to R 1/4" IT	Blister
Reduction	4139605	4 006825 562330	R 1/2" ET to R 3/8" IT	Blister
Reduction	4139630	4 006825 411669	R 3/8" ET to R 1/4" ET	Blister
Hose Connection Tube	4139310	4 006825 411720	Ø 6 mm	Blister
Hose Connection Tube	4139320	4 006825 581652	Ø 9 mm	Blister
Hose Connector Kit	4139500	4 006825 410136	Ø 6 mm	Blister
Clip Kit	4139670	4 006825 411706	5 pcs, 8 - 12 mm	Blister

**Compressed Air Accessories**

Type	Article number	EAN	Properties	Packaging
Blow-out Pistol with 4 Nozzles	4132762	4 006825 659948	Working pressure 2 - 8 bar	Colour box
Blow-out Pistol with 500 mm Nozzle	4132763	4 006825 660531	Working pressure 2 - 8 bar	Blister
2-way Blow-out Pistol	4133210	4 006825 668599	Working pressure 2 - 8 bar	Colour box
Blow-out Pistol, long	4133102	4 006825 417067	Working pressure 2 - 8 bar	Colour box
Blow-out Pistol, short	4133100	4 006825 411065	Working pressure 2 - 8 bar	Colour box
Blow-out Pistol Set	4132759	4 006825 649819	Working pressure 2 - 8 bar	Colour box
Tyre Pressure Gauge, digital	4133115	4 006825 625738	Working pressure 0 - 13 bar	Colour box
Pro Tyre Pressure Gauge	4133110	4 006825 574173	Working pressure 0 - 8 bar	Colour box
Tyre Pressure Gauge	4137000	4 006825 411164	Working pressure 0 - 8 bar	Colour box
Air Tool Set with Bag	4139693	4 006825 674774	15-piece set	Colour box
Air Tool Set with Bag	4139694	4 006825 672381	10-piece set	Colour box
Air Tool Set	4020577	4 006825 654028	10-piece set	Colour box
Compressed Air Set	4132741	4 006825 417050	3-piece set	Colour box

**Assignment of Air Tools and Accessories to Compressors**

	4020415	TE-AC 36/150 Li OF	4020410	TE-AC 18/75 Li OF	4020440	TE-AC 36/8 Li OF Set	4020430	PRESSITO 18/25 Hybrid	4020460	PRESSITO	4020420	PRESSITO 18/25	4020467	PRESSITO 18/21
Blow-out Pistol with 4 Nozzles	4132762	•	•	•	-	-	-	-	-	-	-	-	-	-
Blow-out Pistol with 500 mm Nozzle	4132763	•	•	•	-	-	-	-	-	-	-	-	-	-
2-way Blow-out Pistol	4133210	•	•	•	-	-	-	-	-	-	-	-	-	-
Blow-out Pistol, long	4133102	•	•	•	-	-	-	-	-	-	-	-	-	-
Blow-out Pistol, short	4133100	•	•	•	-	-	-	-	-	-	-	-	-	-
Blow-out Pistol Set	4132759	•	•	•	-	-	-	-	-	-	-	-	-	-
Tyre Pressure Gauge, digital	4133115	•	•	•	-	-	-	-	-	-	-	-	-	-
Pro Tyre Pressure Gauge	4133110	•	•	•	-	-	-	-	-	-	-	-	-	-
Tyre Pressure Gauge	4137000	•	•	•	-	-	-	-	-	-	-	-	-	-
Air Tool Set with Bag, 15-piece	4139693	•	•	•	-	-	-	-	-	-	-	-	-	-
Air Tool Set with Bag, 10-piece	4139694	•	•	•	-	-	-	-	-	-	-	-	-	-
Compressed Air Set, 3-piece	4132741	•	•	•	-	-	-	-	-	-	-	-	-	-

- » Member of the PXC family
- » Automatic starting system
- » 2 speeds
- » Also suitable for wet vacuuming



- » Member of the PXC family
- » 2 speeds
- » Also suitable for wet vacuuming



- » Member of the PXC family
- » 2 speeds
- » Also suitable for wet vacuuming



## PROFESSIONAL CORDLESS WET AND DRY VACUUM CLEANER

### TP-VC 36/30 S Auto

PXC battery voltage	2x 18 V						
Suction power	150 mbar / 100 mbar (BOOST / ECO)						
Tank	Stainless steel, 30 l						
Product weight	8.1 kg (excl. batteries)						
Suction hose	Plastic, 250 cm, heavy-duty material						
Suction tube	Telescopic, stainless steel						
Nozzles	Crevice, upholstery, combination nozzle, power tool adapter (1x each)						
Filters	Foam, pleated filter, dirt bag (1x each)						
Article only available without battery / charger	Article number	2347143					
		4 006825 660067					

1)	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
2)	11 min	13 min	16 min	22 min	28 min	33 min	44 min
3)	8 min	10 min	12 min	16 min	21 min	24 min	32 min

For best performance select batteries with at least 2.5 Ah

1) Battery capacity (2x batteries required)

2) Max. operating time per battery charge in idle mode (ECO mode)

3) Max. operating time per battery charge in idle mode (BOOST mode)

## CORDLESS WET AND DRY VACUUM CLEANER

### TE-VC 36/30 Li S

PXC battery voltage	2x 18 V						
Suction power	150 mbar / 100 mbar (BOOST / ECO)						
Tank	Stainless steel, 30 l						
Product weight	8.0 kg (excl. batteries)						
Suction hose	Plastic, 250 cm, heavy-duty material						
Suction tube	Telescopic, stainless steel						
Nozzles	Crevice, upholstery and combination nozzle (1x each)						
Filters	Foam, pleated filter, dirt bag (1x each)						
Article only available without battery / charger	Article number	2347140					
		4 006825 635874					

1)	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
2)	11 min	13 min	16 min	22 min	28 min	33 min	44 min
3)	8 min	10 min	12 min	16 min	21 min	24 min	32 min

For best performance select batteries with at least 2.5 Ah

1) Battery capacity (2x batteries required)

2) Max. operating time per battery charge in idle mode (ECO mode)

3) Max. operating time per battery charge in idle mode (BOOST mode)

## CORDLESS WET AND DRY VACUUM CLEANER

### TE-VC 36/25 Li S

PXC battery voltage	2x 18 V						
Suction power	150 mbar / 100 mbar (BOOST / ECO)						
Tank	Stainless steel, 25 l						
Product weight	7.0 kg (excl. batteries)						
Suction hose	Plastic, 250 cm						
Suction tube	2-piece, stainless steel						
Nozzles	Crevice, upholstery and combination nozzle (1x each)						
Filters	Foam, pleated filter, dirt bag (1x each)						
Article only available without battery / charger	Article number	2347170					
		4 006825 656527					

1)	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
2)	11 min	13 min	16 min	22 min	28 min	33 min	44 min
3)	8 min	10 min	12 min	16 min	21 min	24 min	32 min

For best performance select batteries with at least 2.5 Ah

1) Battery capacity (2x batteries required)

2) Max. operating time per battery charge in idle mode (ECO mode)

3) Max. operating time per battery charge in idle mode (BOOST mode)

- » Member of the PXC family
- » Also suitable for wet vacuuming



## CORDLESS WET AND DRY VACUUM CLEANER

### TC-VC 18/20 Li S

PXC battery voltage	18 V
Suction power	80 mbar
Tank	Stainless steel, 20 l
Product weight	3.6 kg (excl. battery)
Suction hose	Plastic, 150 cm
Suction tube	3-piece, plastic
Nozzles	Crevice, upholstery and combination nozzle (1x each)
Filters	Foam, pleated filter, dirt bag (1x each)
Article only available without battery / charger	Article number 2347130
	4 006825 625998

<sup>1)</sup>	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<sup>2)</sup>	10 min	11 min	16 min	20 min	25 min	32 min	40 min

For best performance select a battery with at least 2.5 Ah

<sup>1)</sup> Battery capacity

<sup>2)</sup> Max. operating time per battery charge in idle mode

- » Member of the PXC family
- » Also suitable for wet vacuuming



## CORDLESS WET AND DRY VACUUM CLEANER

### TC-VC 18/15 Li

PXC battery voltage	18 V
Suction power	80 mbar
Tank	Plastic, 15 l
Product weight	3.2 kg (excl. battery)
Suction hose	Plastic, 150 cm
Suction tube	3-piece, plastic
Nozzles	Crevice, combination nozzle (1x each)
Filters	Foam filter, filter bag, dirt bag (1x each)
Article only available without battery / charger	Article number 2347145
	4 006825 652086

<sup>1)</sup>	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<sup>2)</sup>	10 min	11 min	16 min	20 min	25 min	32 min	40 min

For best performance select a battery with at least 2.5 Ah

<sup>1)</sup> Battery capacity

<sup>2)</sup> Max. operating time per battery charge in idle mode

- » Member of the PXC family
- » Also suitable for wet vacuuming



## CORDLESS WET AND DRY VACUUM CLEANER

### TE-VC 18/10 Li

PXC battery voltage	18 V
Suction power	90 mbar
Tank	Plastic, 10 l
Product weight	3.1 kg (excl. battery)
Suction hose	Plastic, 200 cm
Nozzles	2-in-1 crevice/brush nozzle and 2-in-1 upholstery/universal nozzle (1x each)
Filters	Foam filter, filter bag, dirt bag (1x each)
Article only available without battery / charger	Article number 2347160
	4 006825 640274

<sup>1)</sup>	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<sup>2)</sup>	10 min	12 min	17 min	21 min	26 min	30 min	42 min

For best performance select a battery with at least 2.5 Ah

<sup>1)</sup> Battery capacity

<sup>2)</sup> Max. operating time per battery charge in idle mode

### Wet and Dry Vacuum Cleaners Accessories

Type	Article number	EAN	Items supplied	Suitable for	Suction hose length	Suction hose diameter
Car Cleaning Set	23.512.45	4 006825 630121	7-piece set	All Einhell wet and dry vacuum cleaners	300 cm	36 mm





- » Member of the PXC family
- » 2-in-1: upright vacuum cleaner and hand vacuum cleaner
- » 2 speeds
- » Easy car cleaning with hose system (available as an option)

## CORDLESS STICK VAC CLEANER

### TE-SV 18 Li

PXC battery voltage	18 V
Tank volume	0.6 l
Product weight	1.1 kg (excl. battery)
Number of batteries / number of chargers	0 / 0
Nozzles	Motorised power brush, 2-in-1 universal nozzle, flexible crevice nozzle
Filters	3-fold filter system: pre-filter, replaceable and washable pleat filter, motor filter
Wall bracket	•
Rubberised wheels	•
LED	•
Packaging	Colour box
Article only available without battery / charger	Article number 2347180
	4 006825 659061

	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
	11 min	13 min	18 min	22 min	28 min	35 min	44 min
	25 min	31 min	38 min	50 min	65 min	80 min	100 min

<sup>1)</sup> Battery capacity

<sup>2)</sup> Max. operating time per battery charge in idle mode (BOOST mode)

<sup>3)</sup> Max. operating time per battery charge in idle mode (ECO mode)

### Cordless Stick Vac Cleaner Accessories

Type	Article number	EAN	Items supplied	Suitable for	Suction hose length	Suction hose diameter
Accessories Set	2351267	4 006825 665017	1 hose, 1 crevice nozzle, 1 upholstery nozzle	TE-SV 18 Li	200 cm	36 mm





- » Member of the PXC family
- » 2 speeds



## CORDLESS HANDHELD VACUUM CLEANER

### TE-HV 18/06 Li

PXC battery voltage	18 V
Suction power	72 mbar / 50 mbar (BOOST / ECO)
Suction volume	1020 l/min
Tank	Plastic, 0.60 l
Product weight	1.0 kg (excl. battery)
Suction tube	2-piece, plastic, 70.0 cm
Nozzles	Crevice, upholstery, floor nozzle (1x each)
Filters	1 washable synthesis filter (1x each)
Wall bracket	•
Article only available without battery / charger	Article number 2347190

<sup>1)</sup>	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<sup>2)</sup>	22 min	26 min	33 min	44 min	54 min	65 min	88 min
<sup>3)</sup>	12 min	15 min	19 min	25 min	32 min	39 min	50 min

<sup>1)</sup> Battery capacity

<sup>2)</sup> Max. operating time per battery charge in idle mode (ECO mode)

<sup>3)</sup> Max. operating time per battery charge in idle mode (BOOST mode)



- » Member of the PXC family



## CORDLESS HANDHELD VACUUM CLEANER

### TE-VC 18 Li

PXC battery voltage	18 V
Suction power	42 mbar
Suction volume	810 l/min
Tank	Plastic, 0.54 l
Product weight	0.9 kg (excl. battery)
Suction tube	Plastic, 46.5 cm
Nozzles	Crevice, upholstery, floor nozzle (1x each)
Filters	1 washable synthesis filter (1x each)
Wall bracket	•
Article only available without battery / charger	Article number 2347120

<sup>1)</sup>	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<sup>2)</sup>	16 min	18 min	23 min	31 min	40 min	46 min	62 min

<sup>1)</sup> Battery capacity

<sup>2)</sup> Max. operating time per battery charge in idle mode

## NEW



- » Member of the PXC family
- » Power source 12 V / 18 V / 230 V
- » Vehicle battery protection
- » Incl. bottle opener



## BATTERY-POWERED COOL BOX

### TE-COL 18/27 Li

PXC battery voltage	18 V
Volume	27 l - 36 cans (of 0.33 l each), 20 bottles (of 0.5 l each) or 6 large 1.5 l PET bottles
Internal dimensions (l x w x h)	33.0 x 24.5 x 34.0 cm
Temperature cooling / heating with Peltier element	Max. cooling capacity - difference to the ambient temperature up to 20°C / Max. holding temperature up to 60 °C
Power regulation	Infinitely variable ECO - MAX
Battery charge indicator PXC battery	3x LEDs on the cool box lid
Energy efficiency class	D (A - G)
Accessories	Incl. connection cables (1 x 12 V, 1 x 230 V) and carrying strap with shoulder pad
Packaging	Colour box
Article only available without battery / charger	Article number 2048420

<sup>1)</sup>	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<sup>2)</sup>	0.7 - 5.8 h	0.8 - 7.2 h	1.0 - 8.7 h	1.3 - 11.7 h	1.8 - 15.0 h	2.0 - 17.3 h	3.0 - 23.3 h
<sup>3)</sup>	1.5 - 6.7 h	1.8 - 8.3 h	2.3 - 10.0 h	3.0 - 13.3 h	3.8 - 17.0 h	4.5 - 20.0 h	6.0 - 26.7 h

<sup>1)</sup> Battery capacity

<sup>2)</sup> Keep cool (MAX - ECO)

<sup>3)</sup> Keep warm (MAX - ECO)

## SEALED TECHNOLOGY

Our most advanced battery system SEALED

- » First IP57 rechargeable battery worldwide
- » High Power 4 Ah Battery Pack
- » Water proof
- » Dust proof



**DUST  
PROOF** **WATER  
PROOF**

## SEALED



### NO CHANCE FOR DUST AND WATER.

Officially tested according to IP57 protection class.\*

### WHAT DOES IP57 MEAN?

#### DUST 5

Protected from all types of foreign bodies and dust – be it wood, brick or metal.



#### 7 WATER

Protected from high pressure water spray and temporary submersion – to a maximum depth of 1 m for up to 30 minutes.



In addition to the sealed housing there is a sensor controlled safety cut out to prevent short circuiting under water.

After the contacts have been dried, the battery is ready for use again.

## ACCESSORIES - BATTERIES

### SEALED

#### 4.0 Ah SEALED Power X-Change Plus Battery



Items supplied	1 battery
PXC battery voltage / capacity	18 V / 4.0 Ah
Battery power	max. 900 W
Product weight	0.58 kg
Article number	4511627
EAN	4 006825 673227

### SEALED

#### 3.0 Ah SEALED Power X-Change Plus Battery



Items supplied	1 battery
PXC battery voltage / capacity	18 V / 3.0 Ah
Battery power	max. 900 W
Product weight	0.57 kg
Article number	4511618
EAN	4 006825 672794

\* Protection according to IP57 applies to the battery itself. It does not apply to tools operated with the battery.

## POWER X-CHANGE PLUS

By switching to the new "21700" cell format (21 mm diameter, 70.0 mm length) our latest Power X-Change batteries have acquired the best combination of power/running time and weight. Why? Using this cell technology it is possible to achieve the same power and running time with five cells instead of the previous ten.


Benefits? The new batteries are 13 % more compact and 12 % lighter than their predecessors – at 100 % power and running time.

Results: Light-weight all-rounders for energy-intensive applications such as in cordless chainsaws.



## MULTI-AH

Thanks to MULTI-Ah Technology, switching over from a 5 Ah battery to a 8 Ah battery is really easy and can be done with just the push of a button. The 5 Ah battery has a 3x longer total service life and is suitable for lighter applications (e.g. cordless lamp or cordless screwdriver). The 8 Ah battery offers them maximum running time for more capacity-intensive applications (e.g. cordless lawn mower or cordless wet and dry vacuum cleaners).

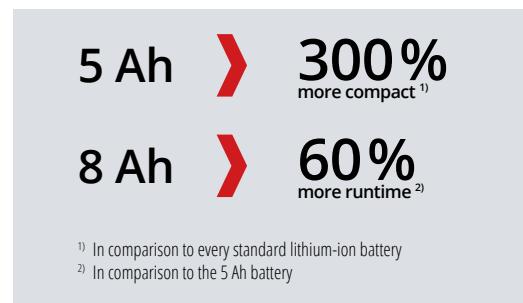

## TWIN-PACK

Every Power X-Change battery from Einhell has a voltage of 18 V. If more power is required for more powerful tools, two 18 V batteries are simply combined in one 36 V device thanks to Twin-Pack Technology. Doubling the voltage automatically doubles the power. Double Twin-Pack Technology allows you to work even longer without recharging. This uses four batteries. If the first two batteries are empty, the system automatically switches to the two additional batteries.



## ACCESSORIES – BATTERIES

### One battery for all devices

Our rechargeable batteries are not only available individually (solo item), but also in a Twin Pack. To get started in the Einhell world, we recommend choosing a Starter Kit (battery + charger)

Less weight and size  PXC Batteries  More power and runtime

					
<b>Article number</b> Solo (1 battery))	4511395	Only available in Starter Kits	4511501	4511618	4511396
<b>EAN</b>	4 006825 610369	–	4 006825 644197	4 006825 672794	4 006825 610376
<b>Power</b>	max. 450 W	max. 720 W	max. 900 W	max. 900 W	max. 900 W
<b>Weight</b>	400 g	460 g	585 g	595 g	670 g
<b>Features</b>					
<b>PLUS – Extra Power</b>			✓	✓	
<b>SEALED</b>				✓	
<b>Multi-Ah</b>					

Less weight and size  PXC Batteries  More power and runtime

					
<b>Article number</b> Solo (1 battery))	4511553	4511627	4511437	4511502	4511600
<b>EAN</b>	4 006825 660869	4 006825 673227	4 006825 616606	4 006825 644210	4 006825 665055
<b>Power</b>	max. 900 W	max. 900 W	max. 1260 W	max. 1350 W	max. 1350 W
<b>Weight</b>	595 g	605 g	890 g	1020 g	1050 g
<b>Features</b>					
<b>PLUS – Extra Power</b>	✓	✓		✓	✓
<b>SEALED</b>		✓			
<b>Multi-Ah</b>				✓	✓



				
<b>Article number</b> Twin-Pack (2 batteries))	4511631	4511489	4511629	4511526
<b>EAN</b>	4 006825 673692	4 006825 638578	4 006825 673685	4 006825 656695

## ACCESSORIES – STARTER KITS

Getting started is easy – with the Einhell Power X-Change Starter Kit

Technical data and features at a glance:






NEW

	2.5 Ah	4.0 Ah	4.0 Ah PLUS	5.2 Ah	4-6 Multi-Ah
Article number (1 battery + 1 charger)	4512097	4512042	4512159	4512147	4512143
EAN	4 006825 646962	4 006825 613704	4 006825 680331	4 006825 675153	4 006825 667653
Article number (2 batteries + 1 charger)	–	4512112	–	–	–
EAN	–	4 006825 655766	–	–	–
Charger (More information in the charger table)	3 A Charger	3 A Charger / 3 A Twincharger	3 A Charger	3 A Charger	6 A Boostcharger
Ready to go	50 min	75 min	75 min	100 min	60 min

## ACCESSORIES – CHARGERS

One charger for all batteries – 100 % compatibility







	3 A Charger	3 A Car Charger	4 A Fastcharger	6 A Boostcharger	8 A Boostcharger
Article number	Only available in Starter Kits	4512113	4512103	Only available in Starter Kits	4512155
EAN	–	4 006825 655377	4 006825 650228	–	4 006825 670554
Charging current	3 A	3 A	4 A	6 A	8 A
Number of ports for PXC batteries	1	1	1	1	1





	3 A Twincharger	4 A Twincharger	4 A Quattrocharger
Article number	4512069	4512161	4512102
EAN	4 006825 629729	4 006825 680638	4 006825 649536
Charging current	3 A (per Port)	4 A (per Port)	4 A (per Port) (parallel charging of 2x2 batteries)
Number of ports for PXC batteries	2	2	4

## OUT-AND-ABOUT AND NO POWER SOCKET AVAILABLE? NO PROBLEM THANKS TO EINHELL!

- » Multiple-port charger
- » Boost mode
- » Protection electronics for the car battery
- » Integrated wall mount
- » Operating voltage: 12 V DC



### Power X-Car Charger 3 A

Items supplied	1 charger
Can be used for	18 V Power X-Change batteries
Charging current	3 A
Article number	4512113
	4 006825 655377

### POWER X-CAR CHARGER PROTECTION ELECTRONICS FOR THE CAR BATTERY

#### 1. The car battery is weak:

Charging stops and both indicator lights blink in alternation – the car battery is protected from further discharge. **In this state the car can still be started.**

#### 2. The car battery is empty:

The indicator lights go out – the car battery is protected from exhaustive discharge.





- » Endless extendable
- » Tongue and groove connection
- » Snap-in function for secure fastening



- » Protects the battery against dust and moisture

## PXC ACCESSORIES

### Battery Mounting Gadget

Items supplied	2 battery mounting gadgets, 4 screws, 4 dowels	
Suitable for (batteries)	all 18 V Power X-Change batteries	
Special feature	The batteries latch in place and are secure in every position	
Article number	4514155	4 006825 658774

## PXC ACCESSORIES

### Battery Protector

Items supplied	1 battery cover	
Suitable for (batteries)	all 18 V Power X-Change batteries	
Can be used for (devices)	HYPRESSO 18/24, TE-DA 18/760 Li, GE-WS 18/10 Li	
Special feature	Protects the battery against dust and moisture	
Article number	4140151	4 006825 670844

## BATTERY CHARGING TIME TABLE

	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah	Shorter charging time
<b>Power X-Charger 3 A</b>								
<b>Power X-Twincharger 3 A</b> (parallel charging of 2 batteries)	40 min	50 min	60 min	75 min	100 min	120 min	160 min	
<b>Power X-Car Charger 3 A</b>								
<b>Power X-Fastcharger 4 A</b>								
<b>Power X-Twincharger 4 A</b> (parallel charging of 2 batteries)	30 min	37 min	45 min	60 min	80 min	90 min	120 min	-25%
<b>2x2 Power X-Quattrocharger 4 A</b> (parallel charging of 2 batteries)								
<b>Power X-Boostcharger 6 A *</b>	30 min	27 min	32 min	40 min	50 min	60 min	80 min	-50%
<b>Power X-Boostcharger 8 A **</b>	30 min	27 min	32 min	40 min	40 min	45 min	60 min	-60%

\* Only 2.5 Ah - 8.0 Ah batteries can be charged with 6 A. Batteries of lower capacity are charged with a lower current.

\*\* Only 5.2 Ah - 8.0 Ah batteries can be charged with 8 A. Batteries of lower capacity are charged with a lower current.



**TWO PARTNERS. ONE MISSION.  
MAXIMUM PERFORMANCE.**

Official Tool Expert



**AMG**  
**PETRONAS**  
FORMULA ONE TEAM

**E Einhell**

# **CHARGING SYSTEMS AND CAR ACCESSORIES 2025/26**